



PRODUCT OVERVIEW

The **TEX** series thermoplastic exit sign features an attractive low profile design. Ideal for commercial & institutional installations, the slim profile of this sign blends perfectly with current interior decors. The **TEX** series uses high-output red or green LED technology. This truly “universal” exit sign, comes standard with two (2) stencils, one (1) backplate and a canopy. AC only and Self-Powered versions are available. The **TEX** series meets Energy Star requirements.

INTERNAL SPECIFICATIONS

AC ONLY: standard 120/277VAC input

SELF-POWERED: standard 120/277VAC input, self-powered versions use sealed nickel-cadmium batteries to provide a minimum 90 minutes of emergency duration. Electronic cut-off circuit prevents overdischarge.

EXTERNAL SPECIFICATIONS

The **TEX** series is constructed from durable corrosion and flame resistant thermoplastic. The **TEX** series comes standard with a mounting canopy, two (2) stencils, one (1) backplate, removable chevrons and all mounting hardware. The **TEX** series comes standard finished in white; optional black finish is available. A damp location rating is standard on all **TEX** series products. An external LED status indicator and test switch is standard on all self-powered models.

INSTALLATION

The **TEX** series exit is suitable for surface ceiling, wall and end mounting. Suitable for indoor and damp location installations.

ORDERING INFORMATION

Series	LED Color	Model	Options
TEX	R (red)	HT (AC only)	B (black housing)
	G (green)	SA (self powered)	

Series	LED Color	Model	Options

MODERN DESIGN

The low profile design of the **TEX** series exit provides a clean, attractive and affordable solution. The durable thermoplastic housing is corrosion and flame resistant. The **TEX** series stencils include removeable chevrons that allow for easy “in the field” installation decisions. The modern and efficient design of the **TEX** series allows for wall, ceiling or end mounting. Canopy and all installation hardware are included.

BATTERY TECHNOLOGY

The **TEX** series is designed with a maintenance free, sealed Nickel-Cadmium battery providing a minimum emergency duration of 90 minutes. Recharge time of the battery is twenty-four (24) hours. The maximum battery working temperature is 50° C.

ELECTRICAL SPECIFICATIONS

The **TEX** series is configured with high-output LED lamps. LED version is standard with 120/277VAC input.

-  RED LED - 4 Watts
-  GREEN LED - 2 Watts




MECHANICAL SPECIFICATIONS

The **TEX** series is constructed of durable corrosion and flame resistant thermoplastic. Field removeable directional chevron arrows are standard. The **TEX** series can be universally mounted single or double face. Canopy and mounting hardware are included. High-output LED technology provides energy savings, long life and even illumination levels. 120/277VAC input, maintenance free, sealed Nickel Cadmium batteries are protected by an electronic cut-off circuit that prevents overdischarge. External test switch and monitor LED are standard on SA versions.

SELF-POWERED VERSIONS

The **TEX-SA** self-powered series is designed to operate on battery power in the event of a regular / mains power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign. The **TEX-SA** self-powered series utilize a solid state transformer technology that eliminates the possibility of relay failure due to particle build up on the relay. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit on AC fail.

DIMENSIONS (in.)

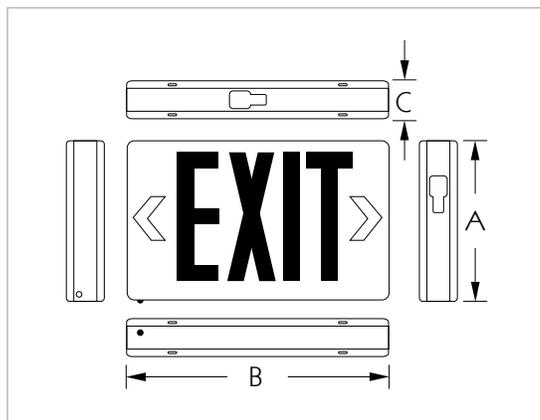

Series	A"	B"	C"
TEX	7.5"	12"	1.5"

WARRANTY

The **TEX** series comes with a 5-year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.